

Part No. 4046250

PERFORMANCE

	@80°F/60%	@75°F/50%
Capacity (Pints/Day)	320	233
Energy Factor (Pints/kWh)	6.8	5.5
(Liters/kWh)	3.2	2.6
Current draw (amps)	9.7 (208V)	8.6 (208V)
	8.2 (240V)	7.5 (240V)

ELECTRICAL

Voltage, Phase, Frequency 208-240V, Single, 60hz

Power (watts)⁽¹⁾ 1,960

Btu/h Total 21,100

Btu/h Motor Load 6,500

Btu/h Heat of Condensation 14,560

Power Cord Type & Length NEMA 6-15P, 6 ft.

MCA / MOP 15 amp / 25 amp

CFM 775

Operating Range Temp °F/%RH 56/40 to 95/100

Control Onboard digital interface with terminal block for external control

Air Filter MERV-13
20"W x 22" H x 2"D
(Part #4042545-01)

Weight 178 lbs.

Refrigerant R454B, 62 oz.

Drain Connection 3/4" FNPT

P-Trap Required Yes

Hanging Built-in 3/8" threaded inserts


Duct Kit Sold separately
(Part #4042685)

Warranty 3-Year Limited*

*1-year full warranty, plus 2-years of parts replacement.

Anden reserves the right to change specifications without notice.

08.26 C © 2026 Anden | anden.com | 877-420-1330

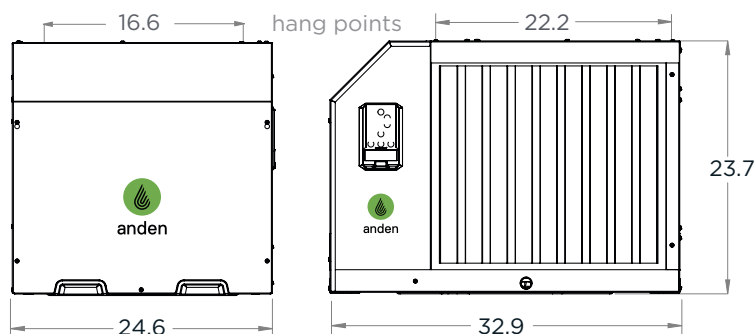

FEATURES

- + **Digital Onboard Control:** easy operation of the machine, with low voltage terminal block for optional external control
- + **Integrated Lift and Hang Points:** allow for easy movement and simple overhead installation
- + **Service Friendly:** removable side panel for easier in-place maintenance and serviceability

INCLUDED ITEMS

Leveling feet, condensate hose, barb fitting



Scan Here
for More

