



High-Capacity, Grow-Optimized Dehumidifier with VLGR Technology

MODEL A710V1 | SUBMITTAL SHEET

Project: _____

Dealer: _____

Architect: _____

Engineer: _____

Contractor: _____


Location: _____

Suppliers: _____

Date: _____

SPECIFICATIONS

Capacity⁽¹⁾ PPD AT 80°/60%RH	720
Energy factor⁽¹⁾	3.1 L/kWh 6.5 pints/kWh
Voltage, Phase, Frequency	208-240VAC, 1 Phase, 60 Hz
Current draw (amps)⁽¹⁾	22.3
Power (Watts)⁽¹⁾	4,600
Btu/h⁽²⁾	15,696
Breaker size	30 amp
Dimensions (cabinet only)	W: 44 7/8" H: 34 13/32" L: 31 23/32"
Weight	360 lbs.
Control	Onboard digital with diagnostics
Filter	29.5"x31.5"x1.75" MERV 11 (Part #5852)
Refrigerant	R-32
Coil type	Copper tube, Aluminum fin with I-coat
Power cord type	SJT, L6-30P, 10ft
Hardwire	Field-configurable
Duct Kit	Sold Separately (Part #5859)
Drain connection*	3/4" FNPT
Drain fittings	3/4" MNPT x 3/4" BARB, 3/4" MNPT x 3/4" Female pipe, 3/4" x 3/4" x 3/4" T-Fitting, 3/4" P-Trap
Warranty	5 Years on all parts including refrigeration system

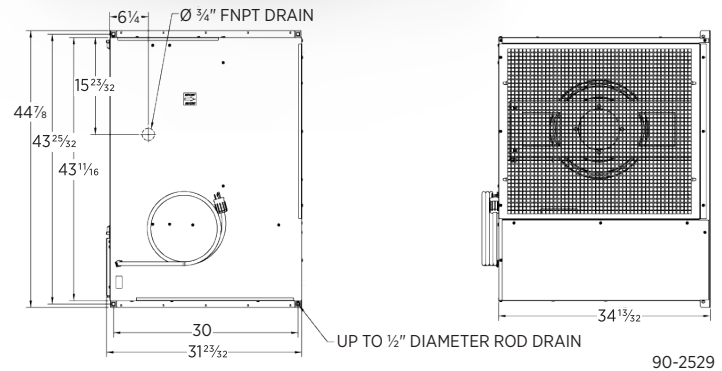

APPLICATION

The Anden Model A710V1 Dehumidifier is the perfect solution for the precise management of humidity required in an indoor growing environment. It features VLGR Technology, which modulates the refrigeration system based on the load, allowing you to maximize VPD and provide greater control during late flower conditions.



⁽¹⁾Rated capacity and energy factor test done and current draw measured at 80°F/60% RH inlet air at 0.0 ESP, 240 VAC.
⁽²⁾Total cooling load @ 80°F/60% RH and 240 VAC.
 * Requires drain trap

The submittal is intended to show general, overall product dimensions and provide guidance for installation clearance. Drawings are not to scale.