anden

Model **A711** V1

Part No. 4046340

PERFORMANCE

	@80°F/60%	@75°F/50%
Capacity (Pints/Day)	705	471
Energy Factor (Pints/kWh)	7.6	5.6
(Liters/kWh)	3.6	2.6
Current draw (amps)	18.2 (208V) 15.8 (240V)	17.0 (208V) 14.7 (240V)

ELECTRICAL

Voltage, Phase, Frequency	208-240V, Single, 60hz
Power (watts)	3,740
Btu/h Total	45,300
Btu/h Motor Load	13,200
Btu/h Heat of Condensation	32,080
Power Cord Type & Length	NEMA 6-30P, 6 ft.
MCA / MOP	27 amp / 45 amp
CFM	1800
Operating Range Temp °F/%RH	56/40 to 95/100
Control	Onboard digital interface with terminal block for external control
Air Filter	MERV-13 18"W x 20" H x 2"D (Part #4038233, Requires 2)
Weight	300 lbs.
Refrigerant	R454B, 100 oz.
Drain Connection	3/4" FNPT
P-Trap Required	Yes
Hanging	Built-in 3/8" threaded inserts
Duct Kit	Sold seperately Exhaust Kit (Part #4044431) Intake Kit (Part #4044432)
Warranty	3-Year Limited*

*1-year full warranty, plus 2-years of parts replacement.
Anden reserves the right to change specifications without notice.

08.26 A © 2026 Anden | anden.com | 877-420-1330

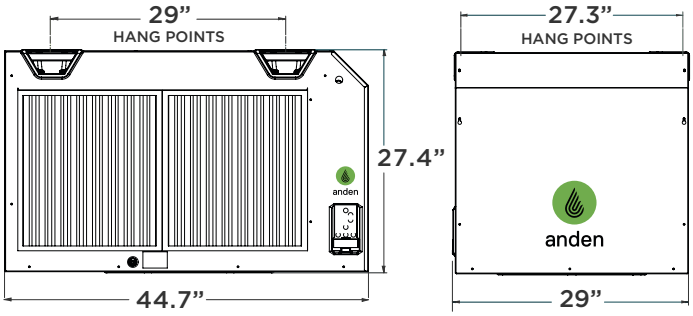

FEATURES

- **Digital Onboard Control:** easy operation of the machine, with low voltage terminal block for optional external control
- **Integrated Suspension Points**: allow for easy movement and simple overhead installation
- **Service Friendly:** removable side panel for easier in-place maintenance and serviceability
- **Enhanced Quality and Reliability:** refined engineering and upgraded components deliver improved durability and dependable performance.

INCLUDED ITEMS

Leveling feet, condensate hose, barb fitting

Intertek

3 YEAR LIMITED WARRANTY*

USA Designed & Assembled in Wisconsin

Scan Here for More